
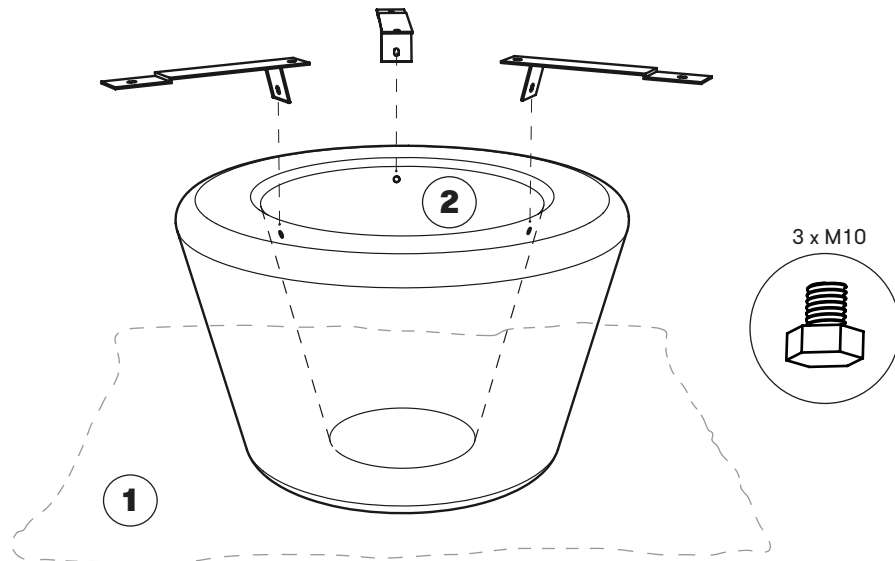


# LOOP CONE PLANTER / TABLE / BACKREST #169

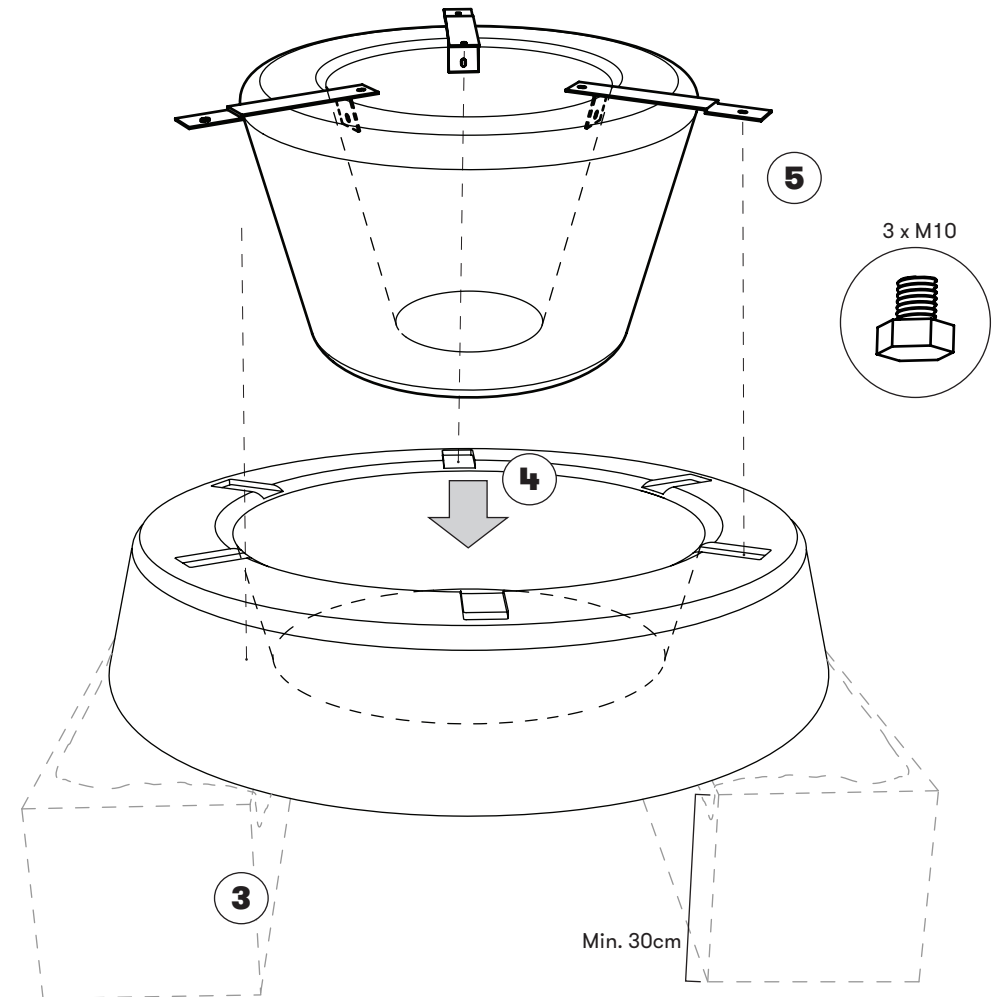

ASSEMBLY WITH LOOP USING B13 ASSEMBLY BRACKET / **BACKREST**



- ① Loop Cone is placed as shown (large diameter upwards) on a non-damaging layer (e.g. a blanket).
- ② In total 3 brackets (b13) is mounted on the inside of Loop Cone with supplied M10 x12 bolts as shown above.
- ③ Loop is elevated at least 30cm above the ground (e.g. 3 EURO pallets) as shown above. Remember non-damaging layer.
- ④ Loop Cone is lowered into the inner part of Loop.
- ⑤ B13 brackets are mounted in the recesses in the bottom of Loop with supplied M10 x12 bolts.

ASSEMBLY WITH LOOP USING B13 ASSEMBLY BRACKET / **BACKREST**

NB: continued on page 09

ASSEMBLY WITH LOOP USING B13 ASSEMBLY BRACKET / **BACKREST**

- 6 The assembly (Loop Cone + Loop) is elevated, turned and placed on ground with the brackets facing downwards.
- 7 The brackets and assembly can be mounted to the ground.
- 8 Loop Cone can be filled with water or with sand, if mounting is not possible or wanted.

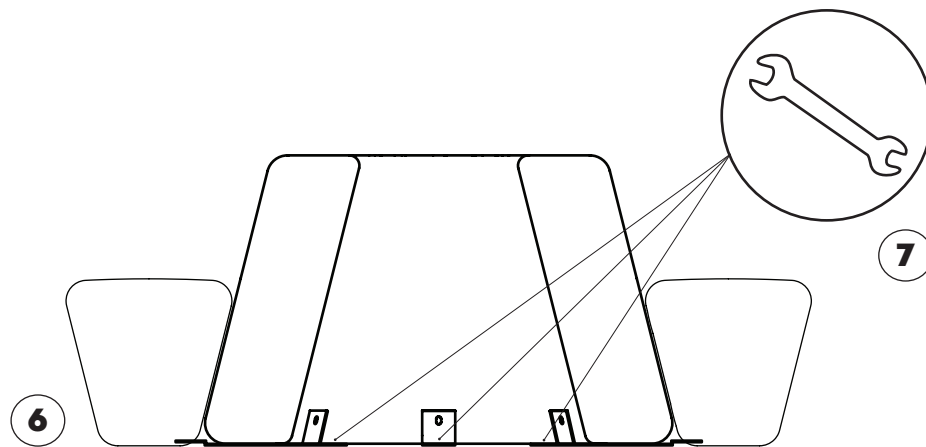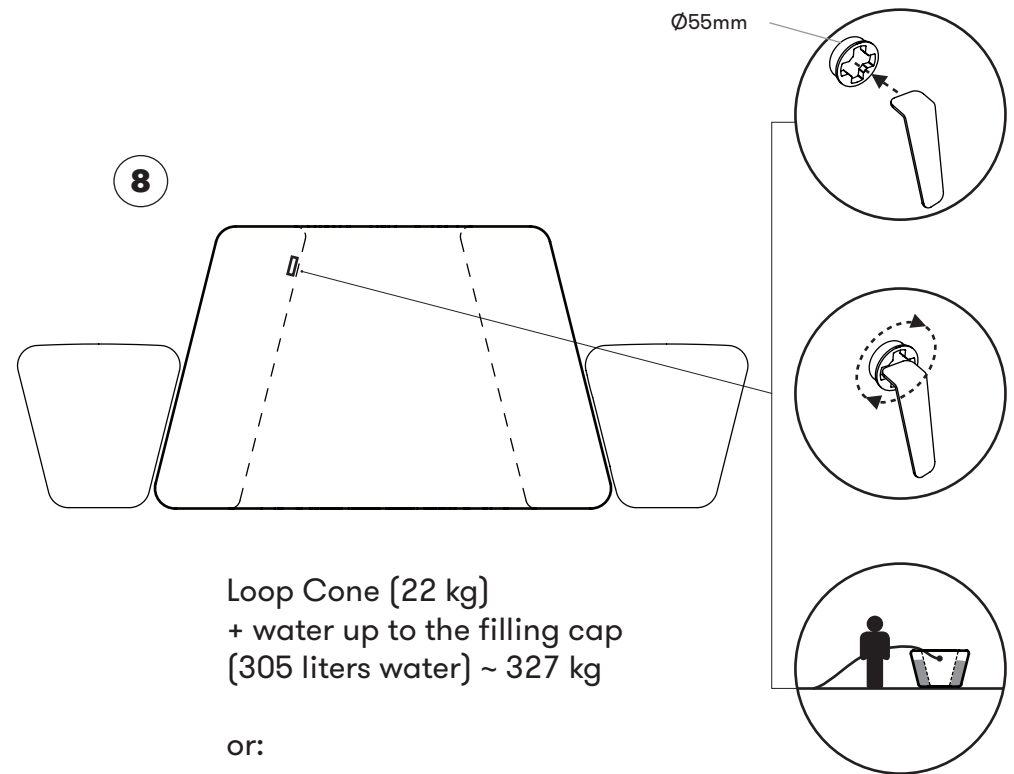FILLED WITH WATER OR SAND / **BACKREST**

## CLEANING INSTRUCTIONS

The material polyethylene withstands almost all detergents. Polyethylene requires no maintenance. The dyed polyethylene preserves the colour - minimal fading by the sun is to be expected.

Pressure washers can be used with advantage to clean the product. This service is often offered by companies that remove graffiti.

After cleaning, use vinyl polish (same as used for car interior) to make the product shine.

## SLIP RESISTANT SURFACES

The products have a textured/granulated surface due to abrasive blasting of the mold.

This process increases friction, resulting in a less slippery surface.

## TABLE TOP

The tabletop of the Loop Table features a smooth surface that requires the same kind of maintenance as the other units.