


Alien

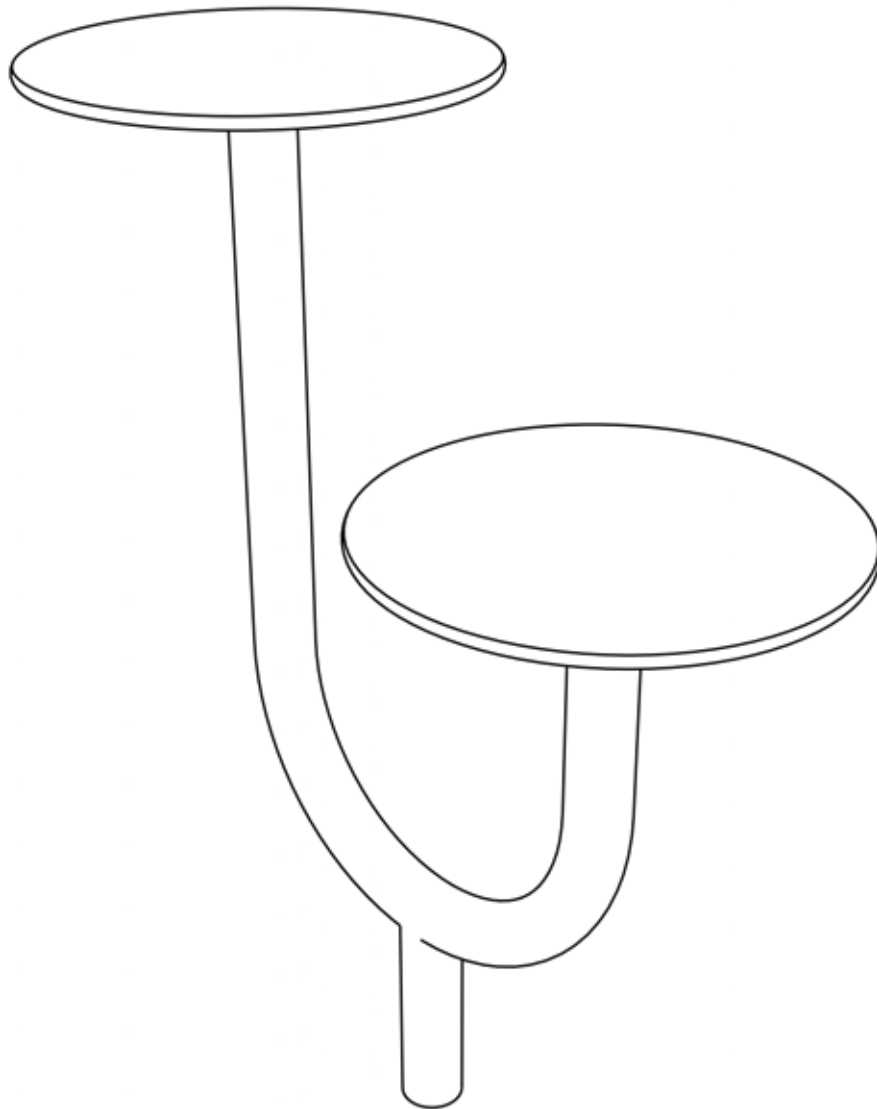

Alien - Tender

Preamble

All products listed and described below are protected by international design law. The transmission of these documents conveys no rights to existing design patents to the recipient or anyone else. Reproduction by a company other than miramondo public design GmbH is not allowed. Violations will be punished through legal means. The court of jurisdiction is Vienna, Austria.

Product range

Furniture for public outdoor spaces consisting of a table-stool combination. Surfaces made of High-Pressure Laminate (HPL). Steel frame made of steel. All furniture is prepared for setting in concrete.

Laminate sheets:

High-Pressure Laminate (HPL) according to ISO 4586/1 and ON EN 438 type CGF with extremely effective weather protection for applications outdoors. Material thickness 11 mm. No organic halogen (chlor, fluor, brom) or sulphur bonds. No heavy metals or asbestos. Slow-burning B2 according to DIN 4102. Chemical resistance and resistance to spots according to EN 438. Food safe according to §28 LMG 75. Waste code according to ÖNORM S 2072 for wood materials and chipboard applies for the disposal of the materials.

Steel frame

All steel parts made of round shaped tubes D60x3 of ST 37.0 according to DIN 2458/1626 as well as sheet steel 5mm in S235JRG2, lasered, bended and welded.

All steel surfaces treated in a multi-layer coating process corresponding to the durability class H (high = more than 15 years) according to DIN EN ISO 12944-5. The following layers are applied:

- 1.) base layer: hot dip galvanizing according to DIN EN ISO 1461, minimum layer thickness according to DIN 50976 (min. 80µm), all zinc surfaces polished and free of zinc tips and other unevenness;
- 2.) intermediate layer: pretreatment according to DIN EN ISO 12944, stained, iron-phosphated, waterrinsed and passivated;
- 3.) final layer: high-temperature powder coating according to DIN 55633 and DIN EN ISO 12944-4 category C3-G3.01, with slightly structured surface, layer thickness according to ISO 2360, adhesion force according to ISO 53151, cross-cut adhesion parameter GT2.

Connection technology

Connection of the laminate sheets to the steel frame with oval head safety screws M6x12 with hexagonal recess and die insert in INOX A2 according to DIN 7991 as well as threaded sleeves M6. Groundfixation setting in concrete.